
ENGLISH/한국어

Experience the Next Evolution in Card Printing

smart 52

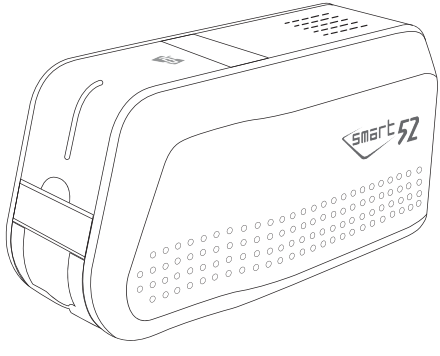


QUICK INSTALLATION GUIDE

iDP


615521

Features

Front

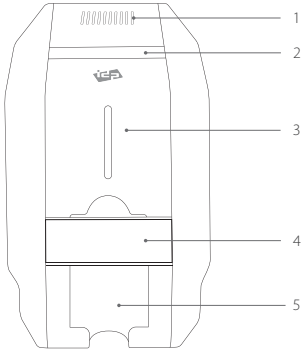


Back

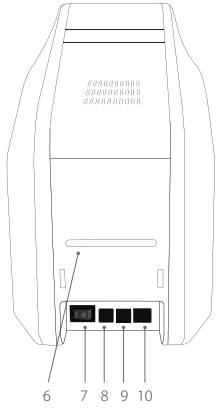

1. Air Vent
2. Top Cover Button
3. Hopper Cover
4. Touch Screen LCD
5. Output Hopper
6. Rear Card Exit Slot
7. On/Off Button
8. Adapter Port
9. Ethernet Port
10. USB Port

Included




SMART-52
Card Printer




Power
adapter



AC Power
cable



USB Cable




Ribbon
Cartridge
(in the Printer)




Quick Guide


I. Printer Installation



1. Open the Top Cover of the Printer by pressing indicated point.




2. Take out the empty Ribbon Cartridge.




3. Prepare the Ribbon and the Ribbon Cartridge.

※ ① Supply core | ② Take-up core




※ Insert the supply core on the cleaning roller side.

4. Insert the cores ① to the hole at first and press the opposite open side ② until it click.




5. Install the disposable cleaning roller in the ribbon cartridge.




6. Peel the protective film off on the disposable cleaning roller.

The ribbon tag side of the supply core should be mounted in the direction of the ribbon tag marking on the cartridge.




7. Insert the ribbon cartridge.

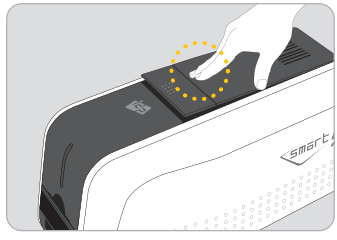

8. Close the top cover of the Printer by pressing the indicated point.



9. Open the hopper cover and load blank cards.

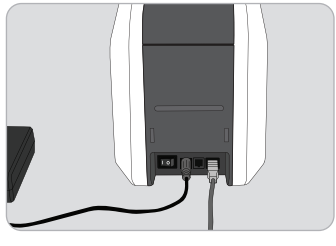

10. Connect the power adapter and USB cable or Ethernet cable.


Do not turn on the printer.
Connect only the USB cable to the PC.

It will be prompted during the following instructions on when to turn on the printer.


※ Use only the power adapter provided with the printer.

Scan the QR code to download the Printer Driver.


II. Printer Driver Installation

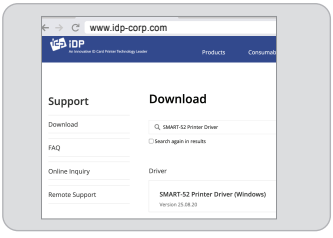

1. Scan the QR Code or Go to **www.idp-corp.com** and search for "Driver" in the Support - Download menu. Download the "SMART-52 Printer Driver". Extract the driver and all its components (Extract All) from the ZIP file and save it on your PC. Do not install the driver from the ZIP program.

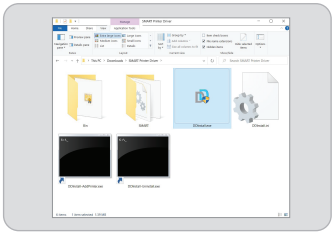


2. Navigate to the extracted zipped files and double click on the "DDinstall.exe" file to begin the installation.

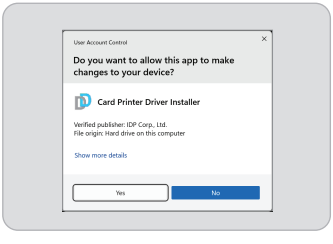


3. If "User Account Control" window is opened, click "Yes".

※ Depending upon your computer's settings, you may be prompted to supply local admin credentials to authorize the installation of the driver.

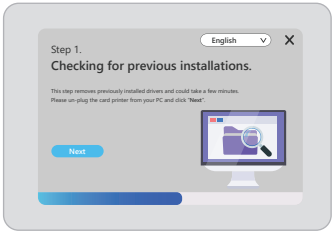


4. To change the language from the default English to something else click "Next".


This step may take a few moments to process.

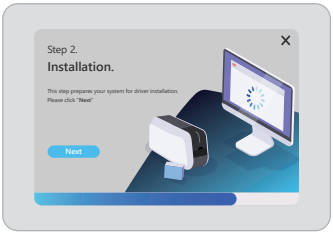

5. Click "Next" to install the printer driver package in STEP 2.

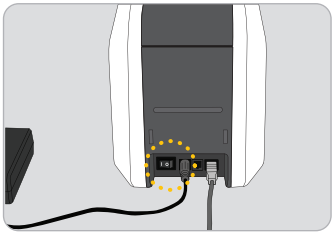

6. Connect the USB cable to PC and turn on the printer by pressing the On/Off button at the indicated point.

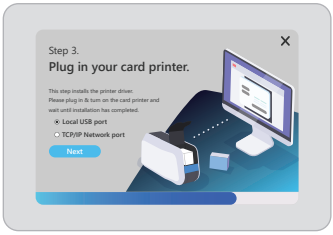


7. In case of USB connection, click “Next” and move to Step 9.
If you are planning on setting up the SMART-52 as a network device, please proceed to Step 8.




※ The Default IP Configuration is DHCP.

8. Search SMART-52 Card Printer connected on the network. Click “OK” after selecting and click “Next”. If the printer is not found, Please configure network setting by referring to “User Manual”.

※ If the printer is on a different network from the PC, please enter the IP address manually.

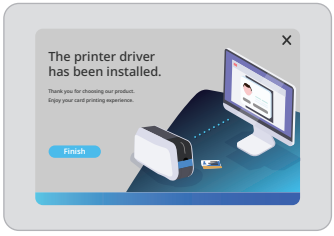


9. Click “Close” after installation has completed.

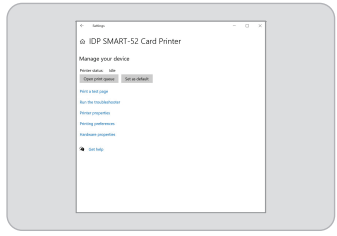


10. Open “Printers and scanners” from “Bluetooth & devices” (or “Devices”) on the Windows “Settings” Click “SMART-52 Card Printer” and select “Manage”. Click “Printer properties”

※ For Windows 7/ 8, access Windows Control Panel and select Device and Printers. Right click “SMART-52 Card Printer” and select “Print Properties”.

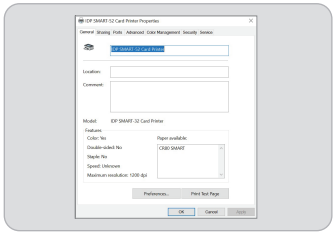


11. Select the “General” tab and click “Print Test Page” to print Test Card.

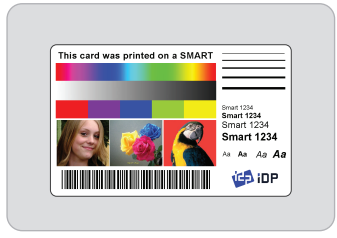


12. Compare the printed Test Card with the image above.


III. Laminator Film Installation Process

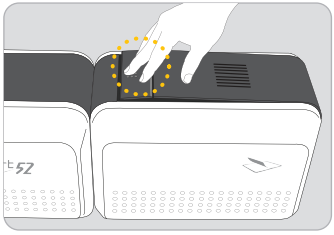


1. Open the top cover of Laminator by pressing indicated point.

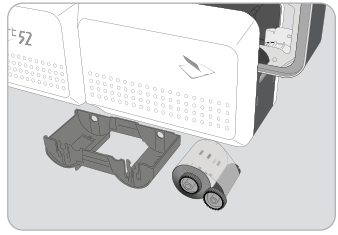


2. Take out the empty film cartridge and prepare the laminator film.

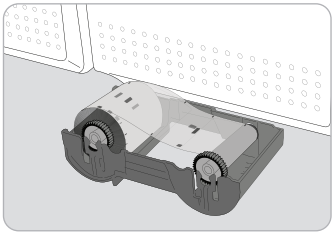

3. Install supply core and take-up core to the holes and press the opposite sides until they click.

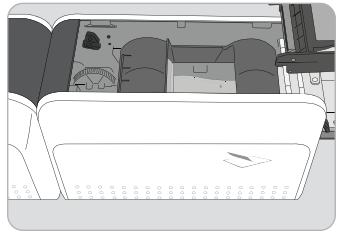


4. Install the film cartridge.

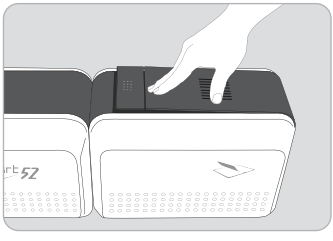

5. Close the top cover of Laminator by pressing indicated point.

Experience the Next Evolution in Card Printing

smart 52

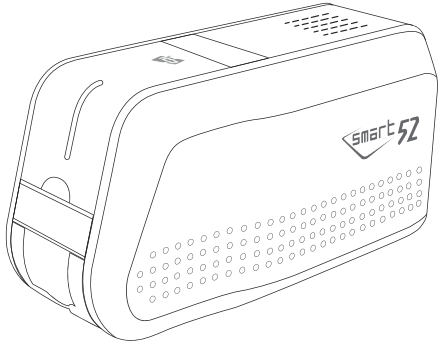


빠른 설치 가이드

iDP


615521

프린터 개요

전면

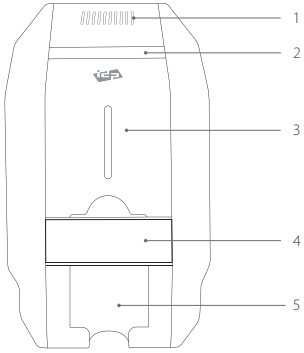

후면

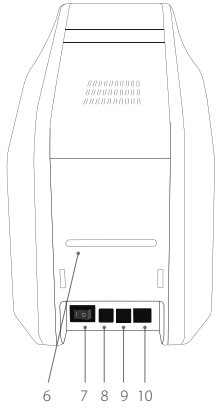

1. 공기 배출구
2. 탑 커버 열림 버튼
3. 호퍼 커버
4. 터치 스크린 LCD
5. 카드 배출구
6. 후면 카드 배출구
7. 전원 스위치
8. 어댑터 포트
9. Ethernet 포트
10. USB 포트

구성품




SMART-52
카드 프린터




파워
어댑터



AC 파워
케이블



USB 케이블




리본 카트리지
(프린터 본체 내장)




퀵 가이드


I. 프린터 설치



1. 표시된 부분을 눌러 프린터 탑커버를 열어 주십시오.




2. 프린터 안쪽 빈 리본 카트리지를 꺼내십시오.




3. 리본 카트리지와 리본을 준비합니다.

※ ① Supply core | ② Take-up core




※ Supply core는 클리닝 롤러 쪽에 장착되어야 합니다.

4. 리본 코어의 기어가 없는 쪽 ①을 홀에 넣고 기어 쪽을 ② "딸깍" 소리가 날 때까지 누릅니다.




5. 1회용 클리닝 롤러 ③ 를 장착합니다.




6. 1회용 클리닝 롤러의 보호필름을 제거합니다.

Supply core의 리본 태그 방향이 카트리지의 리본 태그(RIBBON TAG) 표시 방향으로 올바르게 장착 되어야 합니다.




7. 리본이 장착된 리본 카트리지를 프린터에 그림과 같이 장착합니다.



8. 표시된 부분을 눌러 프린터 탑 커버를 닫습니다.



9. 호퍼 커버를 열고 카드를 적재합니다.



10. 파워 어댑터 및 USB 케이블 또는 이더넷 케이블을 연결합니다.

파워 어댑터는 프린터와 함께 제공된 어댑터만 사용하십시오.


드라이버 패키지의 정상적인 설치를 위해 프린터 드라이버 설치 단계 중 해당 안내가 있을 때 까지 USB 케이블을 PC와 연결하지 마시고 프린터 전원을 켜지 마십시오.

QR 코드를 스캔하여 프린터 드라이버를 다운받으세요.


II. 프린터 드라이버 설치



1. QR 코드를 스캔하거나 www.idp-corp.com 로 접속합니다.
고객센터 - 제품 자료실 메뉴로 이동하여 "SMART-52 드라이버"로 검색한 후 "SMART-52 프린터 드라이버"를 다운받습니다.




2. 다운로드 받은 파일의 압축을 풀고 "SMART-52 Printer Driver" 폴더 내에 "DDinstall.exe" 을 실행합니다.



3. '사용자 계정 컨트롤' 윈도우가 나올 경우, "예"를 클릭하여 프로그램을 실행합니다.


※ 컴퓨터 설정에 따라 드라이버 설치를 승인하기 위해 로컬 관리자 자격 증명을 제공하라는 메시지가 표시 될 수 있습니다.



4. 1 단계에서 언어를 한국어로 선택하고 "다음"을 클릭합니다. 이 단계에서는 시간이 오래 걸릴 수도 있습니다.




5. 2 단계에서 프린터 드라이버 패키지를 설치 할 수 있도록 "다음"버튼을 클릭합니다.



6. PC와 USB 케이블을 연결하고 표시된 부분의 전원 스위치를 I O 눌러 프린터의 전원을 켭니다.



7. 3 단계에서 USB로 연결된 경우에는 “다음” 버튼을 클릭하고 Step 9번으로 가시고, Network 로 연결한 경우에는 Step 8번으로 갑니다.




※ IP 기본설정은 DHCP 입니다.

8. 네트워크에 연결된 SMART-52 프린터를 검색하여 선택한 후 “확인” 버튼을 클릭하고, “다음”버튼을 클릭합니다. 프린터가 검색되지 않는 경우 “SMART-52 사용자 매뉴얼”을 참고하여 네트워크 설정을 먼저 하십시오.

※ 사용 중인 PC와 다른 네트워크에 연결되어 있다면, 프린터의 IP 주소를 직접 입력해주십시오.




9. 정상적으로 설치 된 후 “완료” 버튼을 클릭하십시오.




10. 윈도우 설정에서 “장치 - 프린터 및 스캐너”를 열고 “IDP SMART-52 Card Printer”를 선택하고 “관리” 를 클릭, “프린터 속성”을 선택 합니다. 프린터가 보이지 않으면, “F5”키를 누릅니다.

윈도우 7/ 8 사용자의 경우 제어판의 “장치 및 프린터”를 열고 “IDP SMART-52 Card Printer”를 선택, 마우스 오른쪽 클릭 후 “프린터 속성”을 선택 합니다.




11. “IDP SMART-52 Card Printer 속성’에서 ”테스트 페이지 인쇄” 를 클릭합니다.




12. 테스트 카드가 그림과 같이 정상적으로 인쇄 되었는지 확인합니다.


III. 라미네이터 필름 장착




1. 표시된 부분을 누르면 탑커버가 열립니다.




2. 탑 커버를 열고 빈 필름 카트리지를 꺼내고
필름을 준비합니다.



3. 필름 코어의 기어가 없는 쪽을 홀에 넣고
기어쪽을 "딸깍"소리가 날 때까지 누릅니다.



4. 필름카트리지를 라미네이터에 장착합니다.



5. 표시 된 부분을 눌러 탑커버를 닫습니다 .

IDP WARRANTY CERTIFICATE

Thank you for purchasing our product. IDP Corporation hereby warrants IDP Corporation product sold by IDP Corporation or IDP Corporation authorized dealers in accordance with the following terms and conditions.

SCOPE OF WARRANTY

Warranty Period [_____] from the date of original purchase.

All IDP Corporation products purchased directly from IDP Corporation or an IDP Corporation Authorized Dealer, which are defective in material and/or Workmanship.

※ The warranty period and specific terms apply in accordance with local regulations of the country of sale. Please verify the exact warranty details with your retailer or local authorized dealer.

EXCLUSIONS

1. Defects or damage caused by accident, fire, flood, lightning or other acts of nature.
2. Defects or damage caused by abuse, misuse, negligence or failure to observe the instructions contained in the User manual furnished at the time of original purchase.
3. Damage caused during shipment or handling.
4. Products that have had their serial numbers altered or removed.
5. Products that have been altered or repaired by anyone other than IDP Corporation or an IDP Corporation authorized service center in a manner that has affected their performance, stability or reliability.

제품 보증서

소비자 피해 보상규정에 따라 아래와 같이 제품에 대한 보증을 실시합니다.
제품 고장 발생 시 아이디피 고객지원 센터나 구입처로 연락을 바랍니다.

모델명		구입일	년 월 일
Serial No.		구입처	

※ 무료 보증 범위

제품 구입 후 1년 이내에 정상적인 사용 상태에서 자연 발생된 고장은 무상으로 수리하여 드립니다.
중요 품질 이상 발생 시 교환 또는 환불해 드립니다.

※ 유료 보증 범위

1. 보증기간이 지난 경우
2. 소비자 과실로 인한 고장의 경우 (보증기간 내 포함)
   - 소비자의 취급 부주의 또는 임의수리, 개조 등에 의한 고장 발생 시
   - 사용 중 낙하 등에 의한 고장, 손상 발생 시
   - 판매점 또는 서비스센터 기사가 아닌 제 3자의 수리에 의한 고장 발생 시
   - 사용 전원의 이상 또는 본 제품과 부착, 접속기기의 불량으로 인한 고장 발생 시
3. 그 밖의 천재지변 (화재, 염해, 수해)에 의한 고장 발생 시

Experience the Next Evolution in Card Printing



IDP Corp., LTD.
#601, 50, Digital-ro 33-gil,
Guro-gu, Seoul, Korea,
08377

T +82-2-6099-3700
F +82-2-6099-3717
E sales@idp-corp.com

IDP Americas, Inc.
1485 S County Trail, Unit 306
East Greenwich, RI 02818
USA

T +1-401-400-7111
F +1-401-667-7445
E sales@idpamericas.com

IDP Middle East
LOB18 Office#1203, JAFZA
VIEW 18, Jebel Ali extension,
Dubai U.A.E.

T +971-4-546-8111
E mea@idp-corp.com

© 2026 IDP Corp., Ltd. All rights reserved.